


- (1) Modelo disponible con motore a CC / Model available with DC motor / Modell mit Gleichstrommotor lieferbar
 Modèle disponible avec moteur CC / Modelo disponible con motor de CC / Modelo disponível com motor em CC
 Modello con testa singola / Model with single head / Modell mit einstufiger Verdichtung
- (2) Modèle avec tête simple / Modelo con cabeza individual / Modelo com cabeçote simples
- (3) IEC 34-1: S3 - 25%

Model	250	12	14	80	80	56	58	6	7	1,3
ZA.12 (1) (2) (3)	1	12	14	80	80	56	58	6	7	1,3
ZA.12C (1) (2) (3)	-	3	12	14	80	56	58	7	7	1,3
ZA.155 (3)	50	-	15	18	140	60	62	5	7	1,8
ZA.20CC (3)	250	-	22	-	30/36	58	-	7	5	0,65
ZA.30CC (3)	150	0,2	36	-	48	60	-	7	5	0,8
ZA.30P (3)	200	1	30	35	140	60	62	5	5	1,9
ZA.32 (2)	110	3	32	38	200	50	52	1/4" G	1/4" G	7,1
ZA.60S	10	-	60	70	270	52	54	1/4" G	1/4" G	8,7
ZA.100P	60	-	100	120	270	55	57	1/4" G	1/4" G	8,9
ZA.32BOX	110	-	32	38	200	50	52	Ø 12	-	13,5
ZA.60BOX	10	-	60	70	270	52	54	Ø 12	-	15,3
ZA.100BOX	60	-	100	120	270	55	57	Ø 12	-	15,3


ZA.BOX



ZA.12

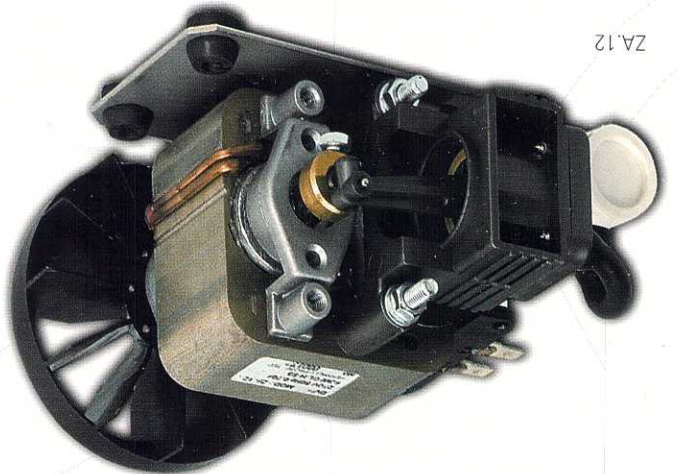

ZA.60S

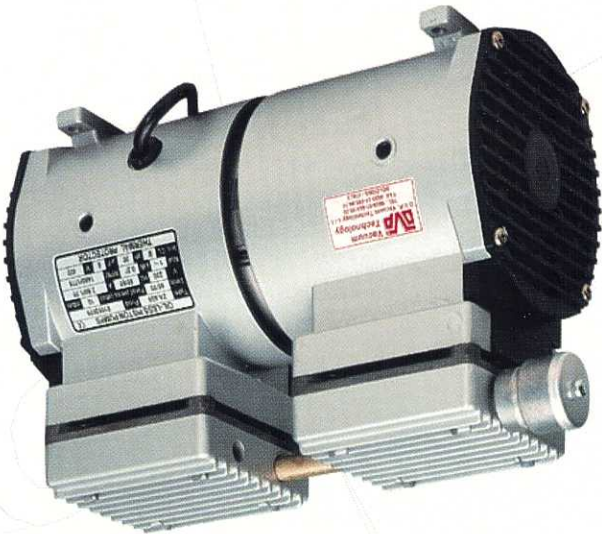

ZA.20CC - 24VDC

