




Serie MG-65


≅ 2900 1/min



Tipo	Motor kW HP	Motor In (A) 400 Δ	In 1/2"	D	DN	U.S. g.p.m. m ³ /h	//min
MG2 65-125B	5,5	7,5	10,3	8,6	100	80	21,5
MG2 65-125A	7,5	10	14,7	8,3	80	65	26,5
MG2 65-160C	9,2	12,5	17,1	8,6	80	65	32,8
MG2 65-160B	11	15	20	6,3	80	65	39,3
MG2 65-160A	15	20	26,8	6,6	80	65	43
MG2 65-200C	15	20	26,8	6,6	80	65	43
MG2 65-200B	18,5	25	34,2	8,2	80	65	48
MG2 65-200A	22	30	40	8,5	80	65	55
MG2 65-200NC	18,5	25	34,2	8,2	80	65	48
MG2 65-200NB	22	30	40	8,5	80	65	55
MG2 65-250NB	22	30	40	8,5	80	65	50,7
MG2 65-250NC	30	40	54,2	7,3	80	65	68,2
MG2 65-250NA	37	50	64,6	7,3	80	65	76

Serie MG-80

≅ 2900 1/min




Tipo	Motor kW HP	Motor In (A) 400 Δ	In 1/2"	D	DN	U.S. g.p.m. m ³ /h	//min
MG2 80-160G	5,5	7,5	10,3	8,6	100	80	17,8
MG2 80-160F	7,5	10	14,7	8,3	100	80	20,2
MG2 80-160E	9,2	12,5	17,1	8,6	100	80	25,3
MG2 80-160D	11	15	20	6,3	100	80	25,3
MG2 80-160C	15	20	26,8	6,6	100	80	26,5
MG2 80-160B	18,5	25	34,2	8,2	100	80	26,5
MG2 80-160A	22	30	40	8,5	100	80	30,5
MG2 80-200B	30	40	54,2	7,3	100	80	40,3
MG2 80-200A	37	50	64,6	7,3	100	80	50
MG2 80-250C	45	60	81,7	7,5	100	80	70,3
MG2 80-250B	55	75	97,8	7,6	100	80	80
MG2 80-250A	75	100	133	7,2	100	80	102

• A richiesta possibile fornire le elettropompe IR, IR-4P, NCB, NCBZ-2P, NCBZ-4P e le pompe MG nella versione in bronzo e acciaio inox. Precisare la natura del liquido pompato per la scelta della tenuta meccanica.

• On request it is possible to supply the electric pumps IR, IR-4P, NCB, NCBZ-2P, NCBZ-4P and the pumps MG in bronze and stainless steel version. Please specify the type of the pumped liquid for the correct mechanical seals.

IR-M

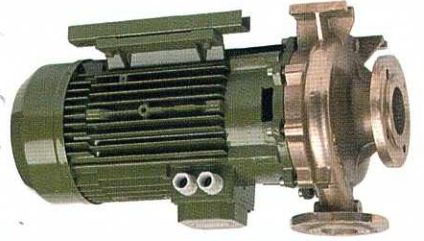

NCB-M



MGX 2

