

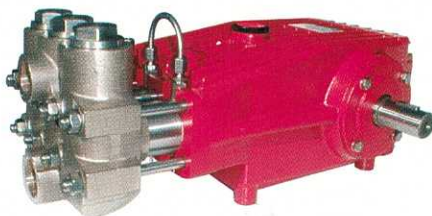


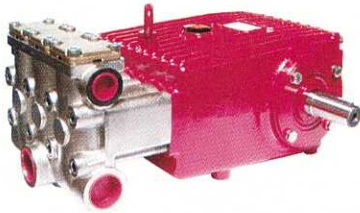

Плунжерные насосы Высокого давления

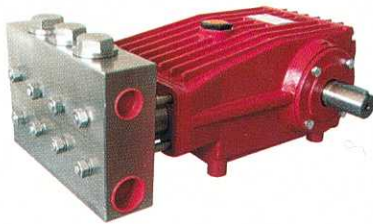

Модель	Объем max. l/min	Давление max. bar	RPM min ⁻¹	Мощность kW
Версия RE - (нержавеющая сталь AISI316 TI)				
P20/15-160RE (VT*)	14,7	160	1420	4,6
P20/18-130RE (VT*)	18,1	130	1420	4,6
P20/23-130RE (VT*)	23,1	130	1420	5,9
P41/58-110RE	58,2	110	1100	13,1
P41/70-110RE	67,7	110	1100	15,2
P50/94-110RE	93,8	110	800	20,3
P51/135-90RE (VT)	134,1	90	800	23,8
P52/37-400RE	37,0	400	1000	30,2
P52/54-270RE	53,6	270	1000	28,3
P52/72-200RE	72,2	200	1000	28,4
P52/100-150RE	98,3	150	1000	29,7
P52/120-120RE (VT)	123,1	120	1000	29,1
P55/100-200RE	104,9	200	1000	42,8
P55/128-160RE	127,8	160	910	41,8
P55/150-130RE	153,0	130	800	40,6
P55/165-100RE	164,6	100	750	33,6
P62/175-120RE NEW!	175,0	120	800	41,6
P71/145-180RE	145,2	180	700	51,5
P71/200-130RE	205,8	130	700	52,7
P71/250-100RE	249,1	100	700	49,0
P72/320-100RE	320,0	100	700	63,0
P80/400-140RE	400,0	140	580	106,0
P81/400-140RE**	400,0	140	580	106,0
Версия B - (для бентонита)				
P30/23-130B	22,5	130	750	6,0
P52/70-100B	70,0	100	570	14,4
P62/160-100B	160,0	100	600	32,7
P72/320-70B	320,0	70	560	44,0
P72/400-70B	400,0	70	700	55,0
P80/500-100B	500,0	100	520	96,0
Версия D - (высокотемпературное исполнение до 105C)				
P11/10-100D	6,5/5,4	60	900/750	0,8/0,7
P11/13-100D	8,0/6,7	60	900/750	1,0/0,9
P11/15-150D	9,3/7,8	60	900/750	1,2/1,0
P21/18-130D (RED)	11,5/9,6	60	900/750	1,5/1,3
P21/23-130D (RED)	14,7/12,2	60	900/750	1,9/1,6
P30/36-150D	23,0/19,1	60	900/750	3,0/2,5
P30/43-130D	26,9/22,5	60	900/750	3,5/2,9
P41/58-110DK (REDK)	39,7	80	750	6,3
P41/70-110DK (REDK)	46,2	80	750	7,3
P50/94-110D (DK, RD, RDK, REDK)	66,8	80	570	10,5
P71/145-180DK (RDK, GDK)	95,0	80	460	15,0
P71/250-100DK (RDK, GDK)	160,3	80	460	26,0

* - REVT-версия давление не более 100 bar

** - возможны другие исполнения по запросу