

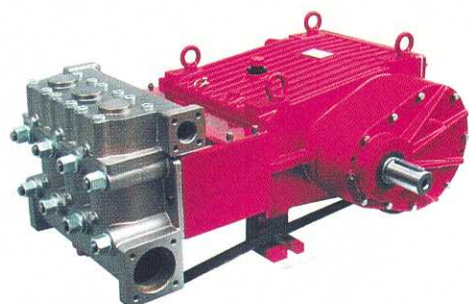
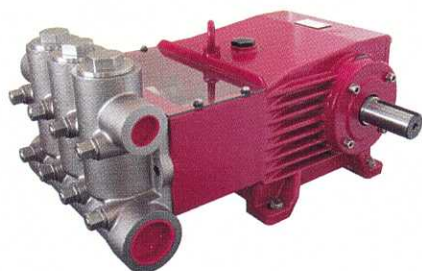
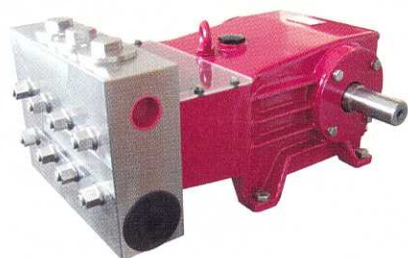


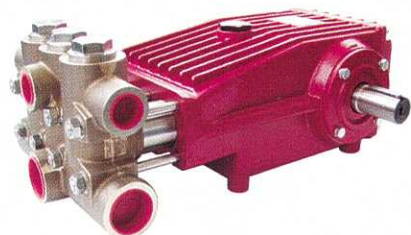

Плунжерные насосы высокого давления

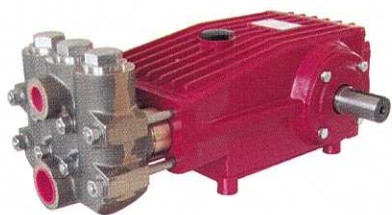

Модель	Объем max. l/min	Давление max. bar	RPM min	Мощность kW
Стандартная версия				
P45/75-180	74,5	180	1000	27,4
P45/85-160	85,5	160	1000	27,9
P45/120-80	123,1	80	1000	20,1
P50/94-110	93,8	110	800	20,3
P51/97-140	97,3	140	1000	26,8
P51/135-90	134,1	90	800	23,8
P52/12-1000	12,8	1000	1000	26,2
P52/17-800	17,5	800	1000	28,5
P52/22-600	22,8	600	1000	27,9
P52/30-500(MS)	30,0	500	1000	29,5
P52/37-400	37,0	400	1000	30,2
P52/40-400	40,0	400	1080	31,5
P52/54-270	53,6	270	1000	28,3
P52/72-200	72,2	200	1000	28,4
P52/100-150	98,3	150	1000	29,7
P52/120-120	123,1	120	1000	29,1
P55/18-1200 NEW!	18,3	1200	1000	42,5
P55/21-1000	20,9	1000	850	41,6
P55/26-800	26,6	800	1050	42,4
P55/50-400 NEW!	50,0	400	850	40,1
P55/80-280G NEW!	78,0	280	1000	41,8
P55/100-200(G)	104,9	200	1000	42,8
P55/128-160(G)	127,8	160	910	41,8
P55/150-130(G)	153,0	130	800	40,6
P55/165-100(G)	164,6	100	750	33,6
P62/70-300	68,1	300	800	41,7
P62/90-210	88,9	210	800	36,8
P62/140-150	139,0	150	800	41,0
P62/175-120	175,9	120	800	41,6
P71/40-700	37,4	700	750	51,5
P71/70-400	67,7	400	750	53,3
P71/90-300	88,5	300	750	52,2
P71/110-250	107,3	250	700	52,8
P71/145-180(G) NEW!	145,2	180	700	51,5
P71/180-200G NEW!	180,0	200	750	70,0
P71/200-130(G)	205,8	130	700	52,7
P71/250-100(G)	249,1	100	700	49,0
P71/...-(G)U*/**	-	-	-	-
P75/210-200G*/**	210,0	200	900	82,5
P75/320-140G*/**	320,0	140	900	88,0
P75/...-(G)U*/**	-	-	-	-
P75/...-(G)UH***	-	-	-	-
P80/110-500	110,0	500	580	106,0
P80/150-380	150,0	380	580	109,0
P80/185-300G	185,0	300	580	107,0
P80/215-260G	213,0	260	580	106,0
P80/285-200(G)	285,0	200	580	108,0
P80/340-170(G)	337,0	170	580	110,0
P80/400-140(G)	400,0	140	580	106,0
P80/500-100G NEW!	500,0	100	520	96,0
P81/500-100G NEW!	500,0	100	520	96,0
P81/110-500**	110,0	500	580	106,0
P81/150-380**	150,0	380	580	109,0
P81/185-300G**	185,0	300	580	107,0
P81/215-260G**	213,0	260	580	106,0
P81/285-200(G)**	285,0	200	580	108,0
P81/340-170(G)**	337,0	170	580	110,0
P81/400-140(G)**	400,0	140	580	106,0

* - Все насосы P71 и P75 могут быть выполнены с встроенным редуктором

** - Редукторы доступны с различными понижающими передачами.

*** - С полым валом для гидравлических приводов